

REV	EON #	DESCRIPTION	DRAWING	APPROVED	DATE
A		NEW RELEASE	DEYI		2012/11/24

NOTES:

1. MATERIAL:

- 1.1 Housing: High Temperature Thermoplastic UL94V-0; Color Black.
- 1.2 Terminal: Copper Alloy.
- 1.3 Nail: Copper Alloy

2. SPECIALITY:

- 2.1 Rated current: 0.5A
- 2.2 Rated voltage: 30V
- 2.3 Contact Resistance: 50mΩ MAX
- 2.4 Insulation Resistance: 100MΩ MIN 100V DC
- 2.5 Dielectric withstanding voltage: 100V AC.
- 2.6 Solder ability: 245±5℃, 5±0.5s.
- 2.7 Durability: 5000 Cycles Min.
- 2.8 Operating condition: Temperature: -30℃ ~ +80℃; Humidity: 80% R.H MAX




PRODUCT NO.

BT33-04 A B 05-00

- ①
- ②
- ③
- ④

PRODUCT SERIES:

- ① BT33: 破板式4PIN电池座
- ② PIN NO.: 03: 3PIN
- ③ MATERIAL: A: LCP
- ④ SERIES NO.: 00: 2.5PITCH 板上1.35

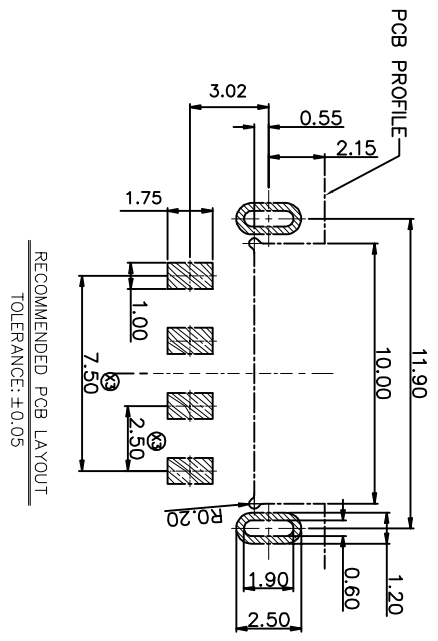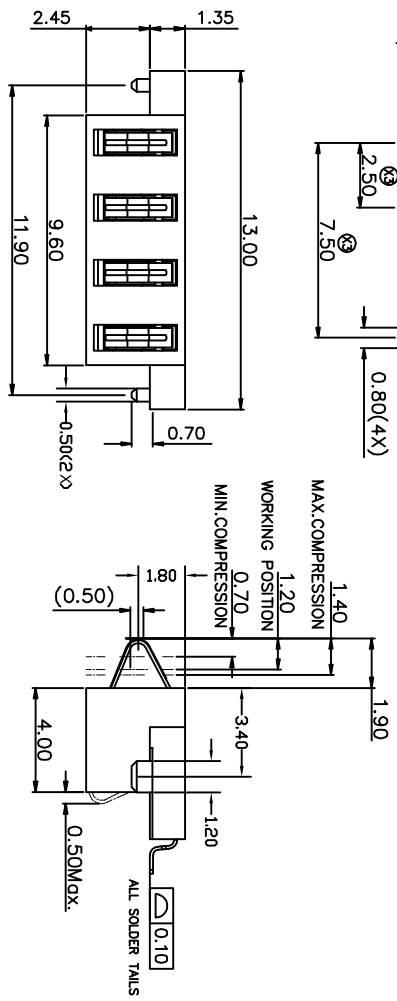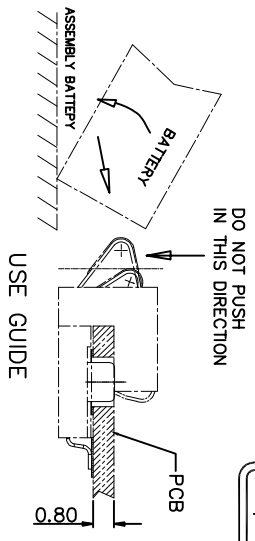

<b>CUSTOMER DRAWING</b>		<b>YTCOON</b> <small>http://www.hnytc.com</small>		<b>Dongguan YTCOON Electronics Technology Co., Ltd</b>	
GENERAL TOLERANCE	DRAWING	DEYI	TITLE:	4PIN BATTERY 2.5PITCH板上1.35	
X ±0.20	APPROVED		P/N:	BT33-04AB05-00	
.XX ±0.15	DATE	2013.03.05	DRAWING NO.	C-BT33-00	
.XXX ±0.10	UNIT	mm	SCALE	1:1	SIZE A4
ANGEL TOLERANCE			SHEET	1of1	SHEET 1of1
X ±3°			REV	A	
.XX ±2°					
.XXX ±1°					