



T-CARD PIN No.	PIN No.	SIM CARD PIN No.	PIN No.
T1	DAT2	P1-A/B	VCC
T2	CD/DAT3	P2-A/B	RST
T3	CMD	P3-A/B	CLK
T4	VDD	P5-A/B	GND
T5	CLK	P6-A/B	VPP
T6	VSS	P7-A/B	I/O
T7	DAT0		
T8	DAT1		

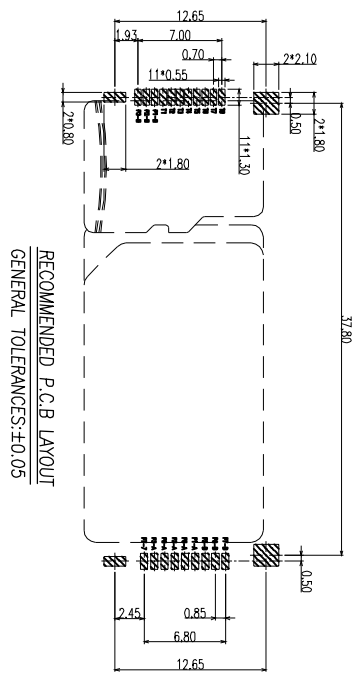

REV	ECN #	DESCRIPTION	DRAWING	APPROVED	DATE
A		NEW RELEASE	DEV1		09/03/16

NOTES:  
1. ELECTRICAL SPECIFICATIONS:  
CURRENT RATING: 0.5A,  
VOLTAGE RATING: 5V,  
CONTACT RESISTANCE: 50 MILLI OHM MAX,  
INSULATION RESISTANCE: 1000 MEG OHM MIN.

2. MECHANICAL SPECIFICATIONS:  
DURABILITY: 5000 CYCLES MIN.

料号编码

SM65-20 C B 07-00  
① ② ③ ④ ⑤

- ① 产品系列: SM65; (DOUBLE SIM CARD+TF CARD) 3IN1 卡座
- ② 产品PIN数: 20; 20PIN
- ③ 塑胶材料: C: LCP
- ④ 塑胶颜色: B: 黑色
- ⑤ 产品流水号 00: 4.5H

TABLE A:

NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
4	COVER	SUS304 T=0.20mm	Au/Ni Plated	1PS
3	SHELL	SUS304 T=0.20mm	Au/Ni Plated	1PS
2	CONTACT	phosphor bronze C5210 T=0.15mm	Au/Ni Plated	1SET
1	HOUSING	High temperature plastic(LCP)	BLACK	1PS

**CUSTOMER DRAWING**



**Dongguan YTCONN Electronics Technology Co., Ltd**

GENERAL TOLERANCE		DRAWING		TITLE:	
X	±0.20	DEV1		4.5H 三合一卡座 (SIM+SIM+TF)	
XX	±0.15	APPROVED		P/N:	SM65-20CB07-00
XXX	±0.10	DATE	2016.11.03	DRAWING NO.	C-SM65-00
ANGEL TOLERANCE		UNIT	mm	SCALE	1:1
X	±3°	SIZE	A4	SHEET	1of1
XX	±2°	REV			A
XXX	±1°				