REV	ECN #	DESCRIPTION	DRAWING	APPROVED	DATE
A		NEW RELEASE	DEYI		2012\04\26

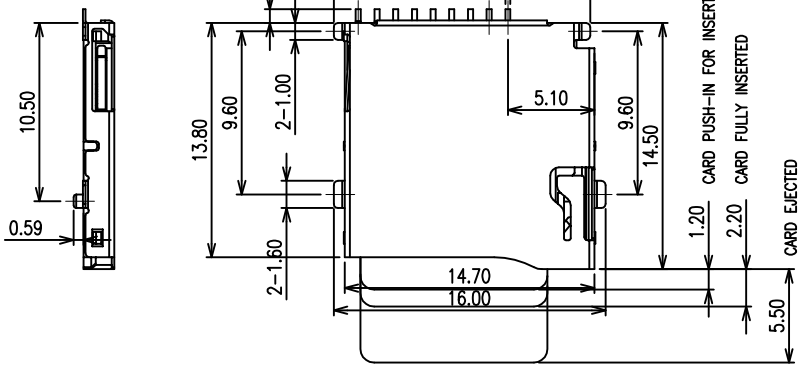

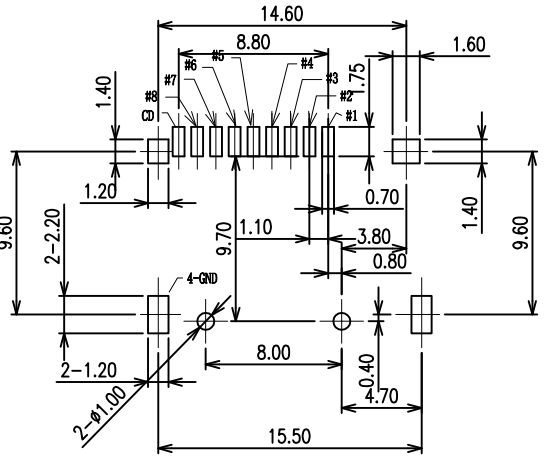

RECOMMEND PCB LAYOUT:
(Unit:mm .X ± 0.15 .XX ±0.05 .XXX ± 0.02)

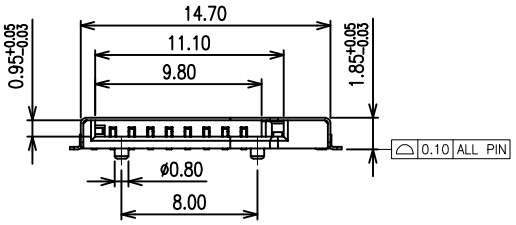



CARD DETECTION SWITCH	
WHEN CARD IS EJECTED	WHEN CARD IS INSERED
OPEN	CLOSE
CD GND	CD GND

Specification
*Electrical Characteristics:
Contact Current Rating:0.5 Amperes.
Dielectric Withstanding Voltage:AC500V r.m.s.
Insulation Resistance:1000 MΩ Minimum.
Contact Resistance:40 mΩ Maximum.
*Environmental:
Operating Temperature:−25°C~+90°C.
*Environmental:
Mating Cyeles:10,000 Insertions.
*Mechanical Characteristics:
Card Push Insertion/Out Force:0.7~1.20kgf.
Contact Separation Force:0.20kgf Minimum.
*Material:
Insulator:HI−Temp Plastic UL 94V−0 Rated.
Cantact:Copper Alloy(t=0.15mm).
Shell:Stainless Steel(t=0.20mm).
Spring:SWP.

PRODUCT NO.

TF04 − 08 A B 05− 00
① ② ③ ④

①产品系列:
TF04:T-FLASH CARD push外焊式
②产品PIN数:
08: 8PIN
③塑胶材料:
A: LCP BLACK
④流水码:
00: 外焊式

CUSTOMER DRAWING	YTCONN http://www.hnytconn.com	Dongguan YTCONN Electronics Technology Co., Ltd.	
GENERAL TOLERANCE X. .X ±0.20 .XX ±0.15 .XXX ±0.10	DRAWING	DEYI	TITLE: T-FLASH CARD CONNECTOR PUSH-PUSH TYPE.外焊式
	APPROVED		P/N: TF04-08AB05-00
ANGEL TOLERANCE X. ±3° .XX ±2° .XXX ±1°	DATE	2013.01.25	DRAWING NO. C-TF04-00
	UNIT mm	SCALE 1:1	SIZE A4 SHEET 1of1 REV A