
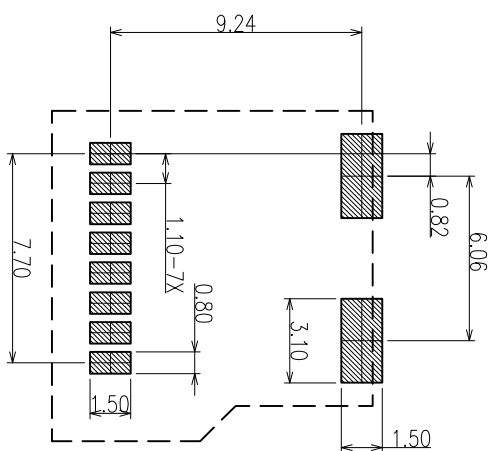
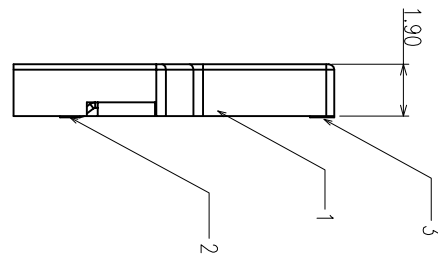


REV	ECN #	DESCRIPTION	DRAWING	APPROVED	DATE
A		NEW RELEASE	DEV1		2012.04.26

- NOTES 1:
- 1.0 RATING.
  - 1.1 VOLTAGE:100 VAC (rms)
  - 1.2 CURRENT: 0.5 AMPERES MAX. PER CONTACT
  - 1.3 OPERATION TEMPERATURE RANGE: -25°C~+90°C
  - 2.0 ELECTRIC CHARACTERISTIC:
  - 2.1 CONTACT RESISTANCE:100mΩ MAX.
  - 2.2 INSULATION RESISTANCE: 1000MΩ MIN.
  - 2.3 DIELECTRIC WITHSTANDING VOLTAGE:500V AC FOR 1 MINUTE
  - 3.0 OPERATION LIFE: 5000 CYCLES
  - 4.0 MATERIAL/FINISH:SEE TABLE A

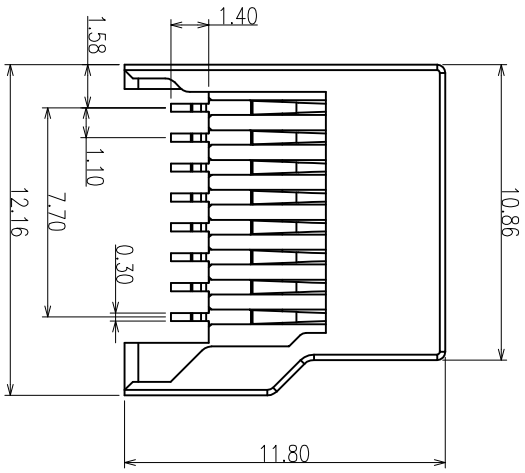

RECOMMENDED PCB LAYOUT  
TOLERANCES ±0.05

PRODUCT NO.


TF05 - 08 A B 05 - 00  
① ② ③ ④

① 产品系列: TF05: T-FLASH CARD CONNECTOR 抽屜式 1.9H

② 产品PIN数: 08: 8PIN

③ 塑胶材料: A: LCP BLACK

④ 流水码: 00: 1.9h

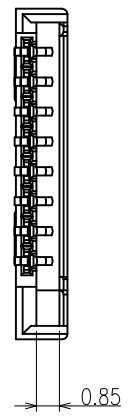

ITEM	NAME	Q'TY/EACH	MATERIAL/FINISHED	REMARK
3	PAD	2	COPPER ALLOY SN PLATED	
2	CONTACT	8	COPPER ALLOY MATING AREA Au PLATED	
1	HOUSING	1	THERMOPLASTIC UL94V-0, BLACK	

**CUSTOMER DRAWING**  
**YTCOON**  
http://www.hnytcoon.com  
Dongguan YTCOON Electronics Technology Co., Ltd.

GENERAL TOLERANCE  
X ±0.20  
.XX ±0.15  
.XXX ±0.10

ANGLE TOLERANCE  
X ±3°  
.XX ±2°  
.XXX ±1°

DRAWING DEVT1 TITLE: T-FLASH CARD CONNECTOR 抽屜式 1.9H  
APPROVED P/N: TF05-08AB05-00  
DATE: 2012. 04. 26 DRAWING NO. C-TF05-00

UNIT	SCALE	SIZE	A4 SHEET	1 of 1	REV	A
mm	1:1	A4	SHEET	1 of 1	REV	A