

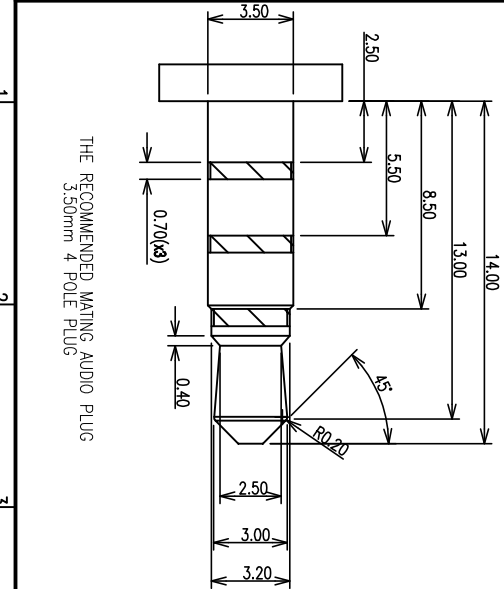




- NOTES :
- 1.0) RATING :
 - 1.1. VOLTAGE : 12 VDC (R.M.S.)
 - 1.2. CURRENT : 1 AMPERE MAXIMUM PER CONTACT AT 30°C T-RISE
 - 1.3. TEMPERATURE : -25°C TO +85°C
 - 2.0) ELECTRICAL CHARACTERISTICS
 - 2.1. CONTACT RESISTANCE : INITIAL 50mΩ MAX. AFTER 100m
 - 2.2. INSULATION RESISTANCE : 100 MΩ MIN.
 - 2.3. DIELECTRIC WITHSTANDING VOLTAGE : 500 VAC AT SEA LEVEL
 - 3.0) MECHANICAL :
 - 3.1. DURABILITY ,MINIMUM: MATED 5000 CYCLES WITHOUT DEGRADING ELECTRICAL
 - 3.2. INITIAL:MATING FORCE: 300g~2000g UNMATING FORCE: 300g~2000g
 - 3.3. AFTER LIFE TESTING:MATING FORCE: 300g~2000g,UNMATING FORCE: 300g~2000g

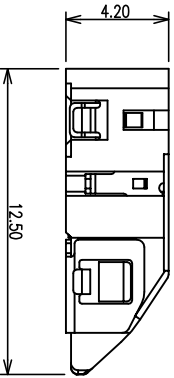

THE RECOMMENDED MATING AUDIO PLUG
3.50mm 4 POLE PLUG

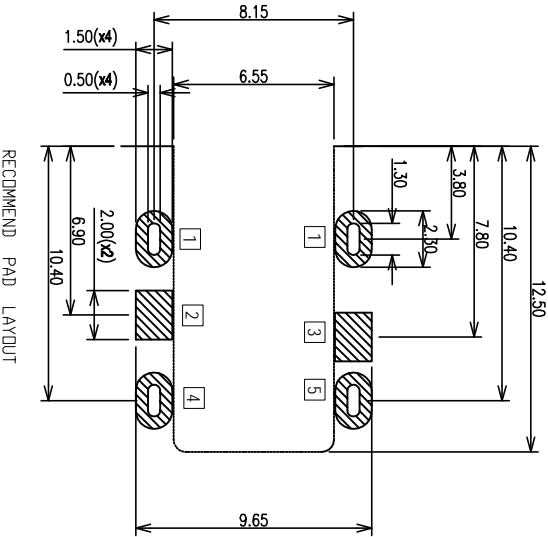

REV	ECN #	DESCRIPTION	DRAWING	APPROVED	DATE
A		NEW RELEASE	DEY1		2012/05/25

PRODUCT NO. PU27-06 A B 03-04
① ② ③ ④

① PRODUCT SERIES:
PU27: PHONE JACK CONNECTOR
② PIN NO.: 06: 6PIN
③ MATERIAL: A: LCP
④ SERIES NO.: 04: 沉板0.8, 前插后插小口型

CUSTOMER DRAWING

YTCOMM Dongguan YTCOMM Electronics Technology Co., Ltd.

GENERAL TOLERANCE	DRAWING	DEY1	TITLE:	AUDIO JACK 3.5mm 斜头
X ±0.20	APPROVED			沉板0.8 (前插后插小口型)
.XX ±0.15	DATE	2014.11.27	P/N:	PU27-06AB03-04
.XXX ±0.10	UNIT	mm	DRAWING NO.	C-PJ27-04
ANGEL TOLERANCE	SCALE	1:1	SHEET	1 of 1
X ±5°	SIZE	A4	SHEET	1 of 1
.XX ±2°	REV	A		
.XXX ±1°				