


REV	ECN #	DESCRIPTION	DRAWING	APPROVED	DATE
A		NEW RELEASE	DEV1		2012/05/25

- NOTES :
- 1.0) RATING :
- VOLTAGE : 12 VDC (R.M.S.)
 - CURRENT : 1 AMPERE MAXIMUM PER CONTACT AT 30°C T-RISE
 - TEMPERATURE : -25°C TO +85°C
- 2.0) ELECTRICAL CHARACTERISTIC
- CONTACT RESISTANCE : INITIAL 50m MAX. AFTER 100m
 - INSULATION RESISTANCE : 100 M MIN.
 - DIELECTIC WITHSTANDING VOLTAGE : 500 VAC AT SEA LEVEL
- 3.0) MECHANICAL :
- DURABILITY , MINIMUM: MATED 5000 CYCLES WITHOUT DEGRADING
- ELECTRICAL
- INITIAL:MATING FORCE: 300g~2000g,UNMATING FORCE: 200g~2000g
 - AFTER LIFE TESTING:MATING FORCE: 300g~2000g,UNMATING FORCE: 200g~2000g

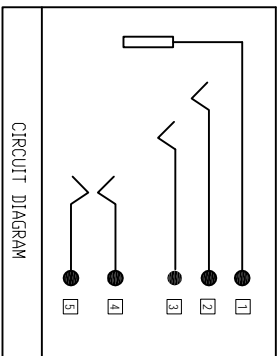

PRODUCT NO.

PJ27-06 A B 03-00

① ② ③ ④

PRODUCT SERIES:

PJ27: PHONE JACK CONNECTOR

PIN NO.:

06: 6PIN

MATERIAL:

A: LCP

SERIES NO.:

00: 反沉2, 6, 前后插板, 中间脚板

YTCOON

Dongguan YTCOON
Electronics Technology Co., Ltd

**CUSTOMER
DRAWING**

DRAWING DEV1

TITLE:
AUDIO JACK ø3.5mm 反沉2, 6 SMT+DIP CONN

GENERAL TOLERANCE

X ±0.20

.XX ±0.15

.XXX ±0.10

ANGEL TOLERANCE

X ±5°

.XX ±2°

.XXX ±1°

APPROVED

P/N:

DATE

2014. 01. 02

DRAWING NO.

UNIT

mm

SCALE

1:1

SIZE

A4

SHEET

1 of 1

REV

A