



THE RECOMMENDED MATING AUDIO PLUG
3.50mm 4 POLE PLUG

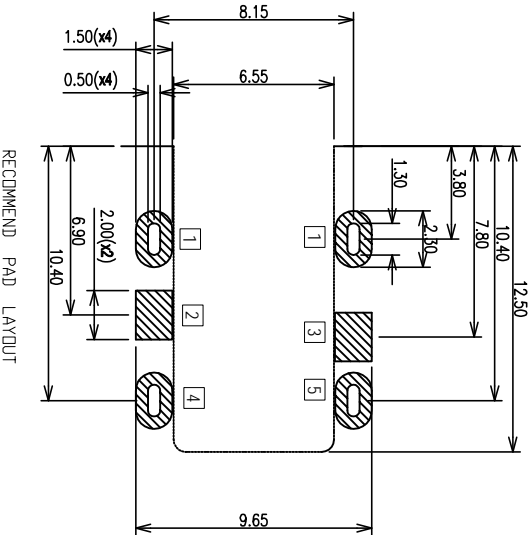

RECOMMEND PAD LAYOUT

REV	ECN #	DESCRIPTION	DRAWING	APPROVED	DATE
A		NEW RELEASE	DEV1		2012/05/25

- NOTES :
- 1.0) RATING :
- VOLTAGE : 12 VDC (R.M.S.)
 - CURRENT : 1 AMPERE MAXIMUM PER CONTACT AT 30°C T-RISE
 - TEMPERATURE : -25°C TO +85°C
- 2.0) ELECTRICAL CHARACTERISTIC
- CONTACT RESISTANCE : INITIAL 50mΩ MAX. AFTER 100m
 - INSULATION RESISTANCE : 100 MΩ MIN.
 - DIELECTIC WITHSTANDING VOLTAGE : 500 VAC AT SEA LEVEL
- 3.0) MECHANICAL :
- DURABILITY ,MINIMUM: MATED 5000 CYCLES WITHOUT DEGRADING
 - INITIAL:MATING FORCE: 300g~2000g UNMATING FORCE: 300g~2000g
 - AFTER LIFE TESTING:MATING FORCE: 300g~2000g,UNMATING FORCE: 300g~2000g



- PRODUCT NO. _____
- PJ27-06 A B 03-02
- ① PRODUCT SERIES:
 - ② PIN NO.:
 - ③ MATERIAL:
 - ④ SERIES NO.:
- PJ27: PHONE JACK CONNECTOR
06: 6PIN
A: LCP
02: 沉板0.8, 前插后插

CUSTOMER DRAWING		YTCONN		Dongguan YTCONN Electronics Technology Co., Ltd	
GENERAL TOLERANCE	DRAWING	DEV1	TITLE:	AUDIO JACK 3.5mm 斜头	
X ±0.20	APPROVED		P/N:	沉板0.8 (前插后插)	
.XX ±0.15	DATE	2014.06.27	DRAWING NO.	C-PJ27-02	
.XXX ±0.10	UNIT	mm	SCALE	1:1	SIZE A4
ANGEL TOLERANCE			SHEET	1of1	REV A
X ±5°					
.XX ±2°					
.XXX ±1°					