

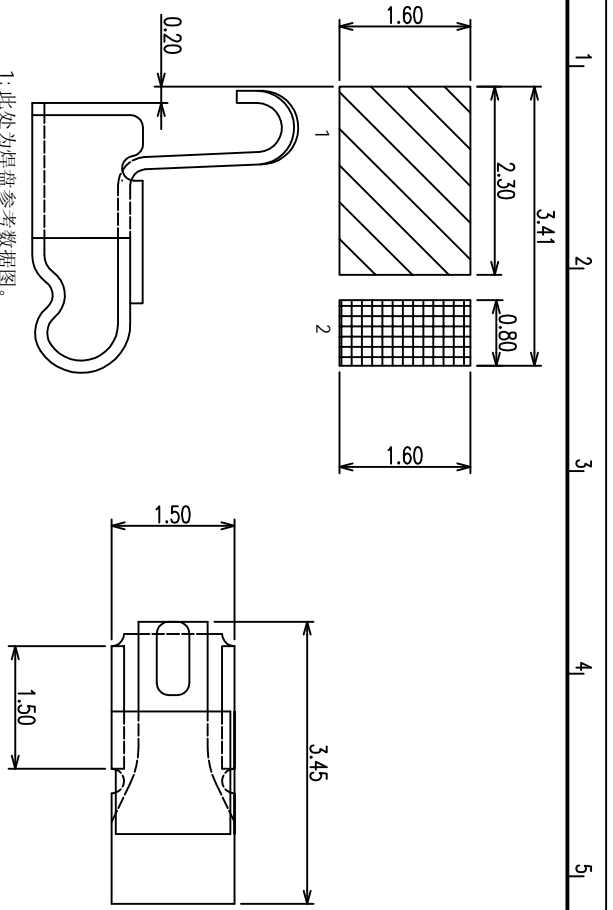


| REV | ECON # | DESCRIPTION | DRAWING | APPROVED | DATE |
|-----|--------|-------------|---------|----------|------|
| A | | NEW RELEASE | DEVI | | |
| | | | | | |

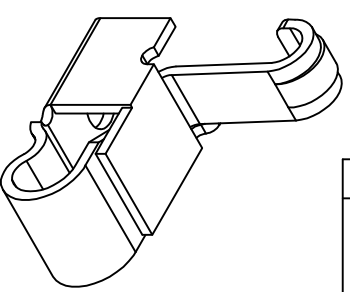

1: 此处为焊盘参考数据图。
2: 此处PCB板需避开, 避免接触短路。

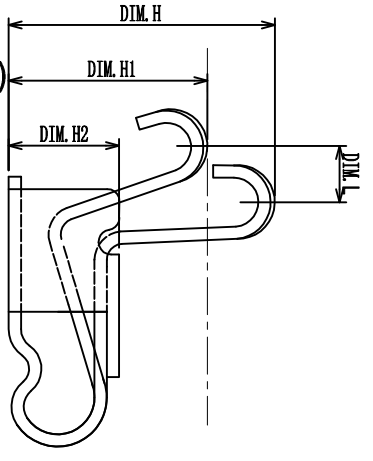

(lowest to compress)






TABLE:

| ITEM | TP32-01L207-00 | 3.2 | 2.43 | 1.35 | 0.69 |
|------|----------------|-------|--------|--------|-------|
| | PRODUCT NO. | DIM.H | DIM.H1 | DIM.H2 | DIM.L |

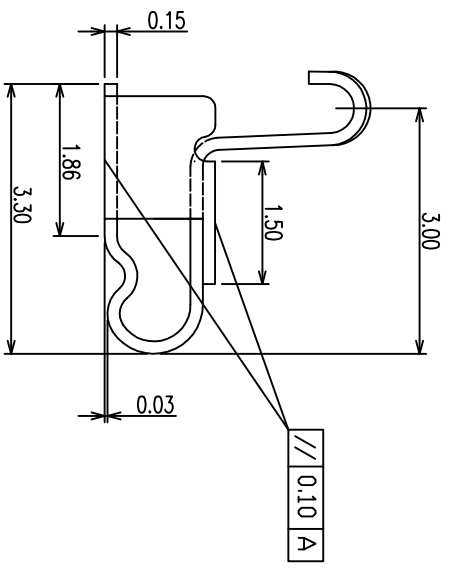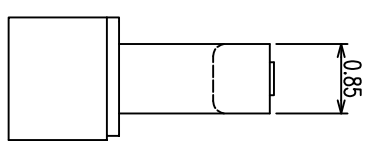

- PRODUCT NO.**
TP32-01 G2 07-00
① ② ③ ④ ⑤
- PRODUCT SERIES:**
① TP32: 3.2H天线弹片
② PIN NO.: 01: 1PIN
③ MATERIAL: G2: SUS304
④ 表面处理: 07: 全金
⑤ SERIES NO.: 00: 3.2H
- 电气性能
 - ▲接触电阻 $\leq 100m\Omega$
 - ▲额定电压 15VAC/DC/MAX
 - ▲额定电流 1.0A/MAX
 - ▲耐压 500V AC/1分钟
 - ▲绝缘电阻 $\geq 1000M\Omega / mI n$
 - 机械特性
 - ▲触点正向压力: $0.5 \pm 0.1N/pin$, 压缩到工作高度2.5mm
 - ▲机械寿命 正向压缩端子到2.1mm高度 ≥ 5000 次
 - ▲工作温湿度 $-25^{\circ}C \sim +85^{\circ}C / 5 \sim 85R.H.$
 - ▲储存温湿度 $-40^{\circ}C \sim +85^{\circ}C / 5 \sim 95R.H.$
 - ▲产品需高温测试
 - ▲耐焊接温度在 $260^{\circ}C$ 1时,
 - ▲平面度要求
 - ▲端子焊脚的平面度 $\leq 0.1mm$
 - ▲成品功能要求面不可有端子压伤之不良现象
 - ▲产品采用载带包装, 每盘2.5kpcs.
 - ▲产品符合ROHS标准

| PRAT DRAWING | | YTCOON | | Dongguan YTCOON Electronics Technology Co., Ltd. | |
|-------------------|---|----------|------------|--|----------------|
| GENERAL TOLERANCE | X. ± 0.10 .XX ± 0.05 .XXX ± 0.02 | DRAWING | DEVI | TITLE: | 3.2H天线弹片 |
| ANGEL TOLERANCE | X. $\pm 3^{\circ}$.XX $\pm 2^{\circ}$.XXX $\pm 1^{\circ}$ | APPROVED | | P/N: | TP32-01G207-00 |
| | | DATE | 2013.08.29 | DRAWING NO.: | C-TP32-00 |
| | | UNIT | mm | SCALE | 1:1 |
| | | SIZE | A4 | SHEET | 1 of 1 |
| | | REV | A | | |