
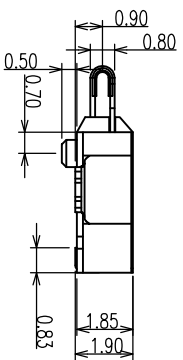
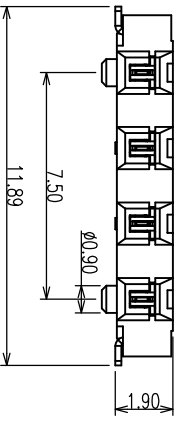
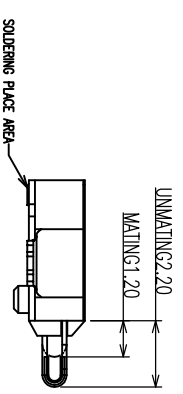
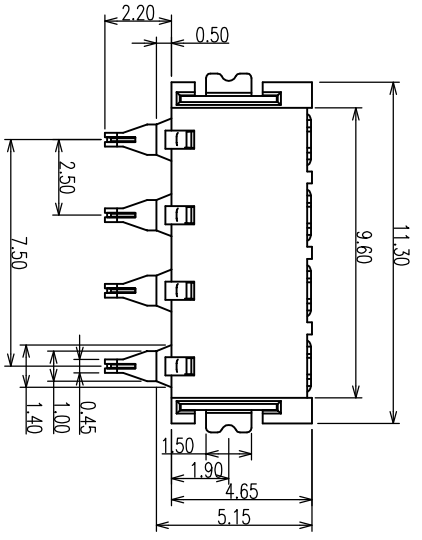


REV	ECON #	DESCRIPTION	DRAWING	APPROVED	DATE
A		NEW RELEASE	DEV1		

- 1-1.HOUSING: THERMOPLASTIC,UL 94V-0,COLOR:BLACK
- 1-2.CONTACT:COPPER ALLOY T=0.15mm
- 1-3.NAIL:STAINLESS STEEL T=0.20mm
- 2-1.CONTACT: 3u" AU PLATING ON CONTACT AREA
100u" Min. Mather-Sn PLATING ON SOLDERTAILS
50u" Min. NICKEL UNDERPLATING OVER ALL
- 2-2.NAIL:50u" Min. NICKEL UNDERPLATING OVER ALL
100u" Min. Mather-Sn OVERALL
- 3.PRODUCT SPECIFICATIONS:
3-1.VOLTAGE RATING:250V
3-2.CURRENT RATING:2.0A
3-3.INSULATION RESISTANCE:1000MEG OHM MIN
3-4.OPERATION TEMPERATURE:-55 TO +125
3-5.DURABILITY:3000 CYCLES, AFTER TEST THE NORMAL FORCE ATTENUATION CANNOT EXCEED 15%
- 3-6.NORMAL FORCE:60gf Min. AT THE WORKING POSITION

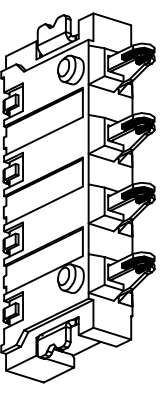

PRODUCT NO.

BT37-04 C B 03-01

① ② ③ ④

PRODUCT SERIES:

○ BT37: BATTERY SERIES

○ PIN NO. :


04: 4PIN

③ MATERIAL:

C: LCP

④ SERIES NO. :

01: 2.5PITCH, 1.9H内焊

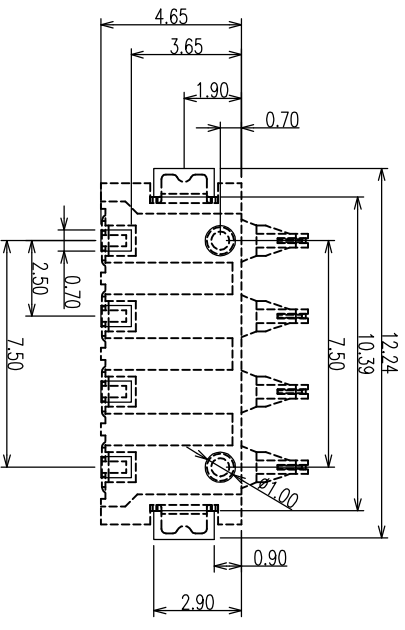

YTCOONN

Dongguan YTCOONN
Electronics Technology Co., Ltd

PRAT
DRAWING

GENERAL TOLERANCE

X ±0.10

.XX ±0.05

.XXX ±0.02

ANGEL TOLERANCE

X ±3°

.XX ±2°

.XXX ±1°

DRAWING	DEV1	TITLE:	4PIN BATTERY 2.5PITCH, 1.9H内焊
APPROVED		P/N:	BT37-04B03-01
DATE	2013.10.06	DRAWING NO.	C-BT37-02

UNIT	mm	SCALE	1:1	SIZE	A4	SHEET	1of1	REV	A
------	----	-------	-----	------	----	-------	------	-----	---