
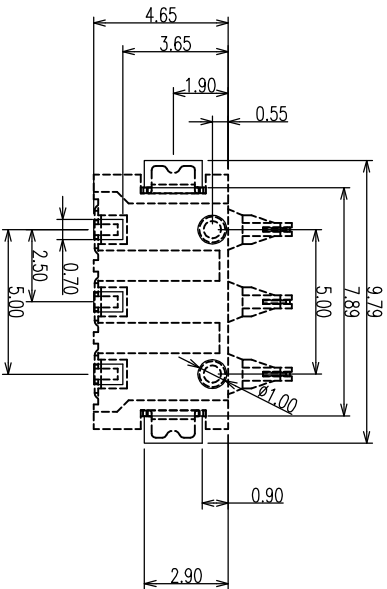


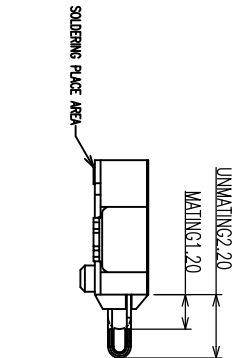



REV	EON #	DESCRIPTION	DRAWING	APPROVED	DATE
A		NEW RELEASE	DEYI		2012/11/24

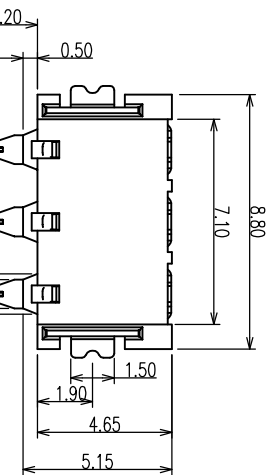

- NOTES:
- MATERIAL
 - HOUSING: THERMOPLASTIC, UL 94V-0, COLOR: BLACK
 - CONTACT: COPPER ALLOY T=0.20mm
 - NAIL: STAINLESS STEEL T=0.15mm
 - FINISH
 - CONTACT: 3μ Au PLATING ON CONTACT AREA
 - NAIL: 50μ Ni Matte-Sn PLATING ON SOLDERAILS
 - NAIL: 50μ Ni Matte-Sn PLATING ON SOLDERAILS
 - NAIL: 50μ Ni Matte-Sn PLATING ON SOLDERAILS
 - PRODUCT SPECIFICATIONS:
 - VOLTAGE RATING: 250V
 - CURRENT RATING: 2.0A
 - INSULATION RESISTANCE: 1000MΩ OHM MIN
 - OPERATION TEMPERATURE: -55 TO +125
 - DURABILITY: 3000 CYCLES, AFTER TEST THE NORMAL FORCE ATTENUATION CANNOT EXCEED 15%
 - NORMAL FORCE: 60gf Min. AT THE WORKING POSITION

- PRODUCT NO.:
- BT37-03 C B 03-00
- ① ② ③ ④
- PRODUCT SERIES:
- ① BT37: BATTERY SERIES
- ② PIN NO.:
- 03: 3PIN
- ③ MATERIAL:
- C: LCP
- ④ SERIES NO.:
- 00: 2.5PITCH, 1.9H

CUSTOMER DRAWING		YTCONN <small>http://www.hnytc.com</small>		Dongguan YTCONN Electronics Technology Co., Ltd.	
GENERAL TOLERANCE	X ±0.20 .XX ±0.15 .XXX ±0.10	DRAWING	DEYI	TITLE:	3PIN BATTERY 2.5PITCH, 1.9H
ANGEL TOLERANCE	X ±3° .XX ±2° .XXX ±1°	APPROVED		P/N:	BT37-03CB03-00
		DATE	2013.06.14	DRAWING NO.	C-BT37-00
		UNIT	mm	SCALE	1:1
		SIZE	A4	SHEET	1 of 1
		REV	A		