
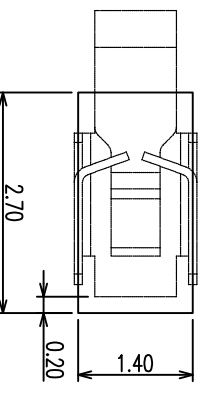
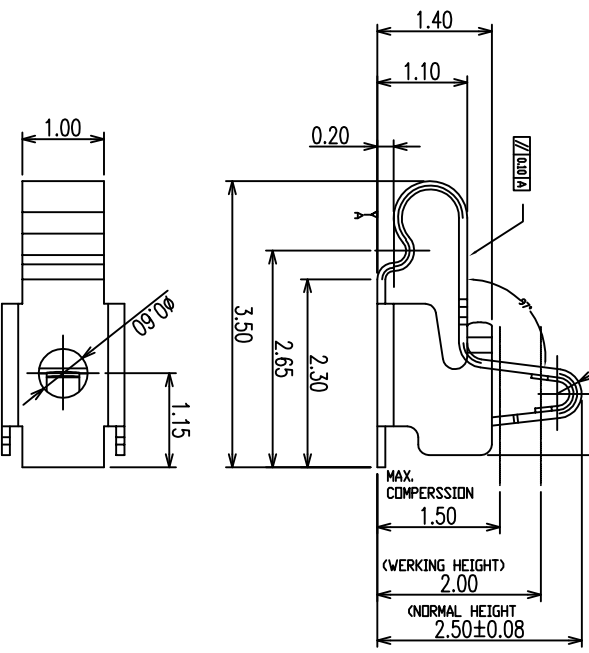
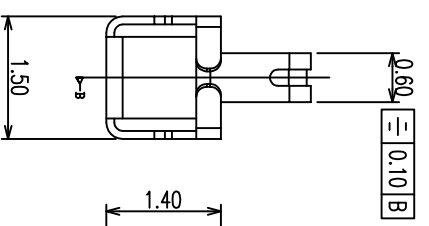



REV	ECON #	DESCRIPTION	DRAWING	APPROVED	DATE
A		NEW RELEASE	DEVI		

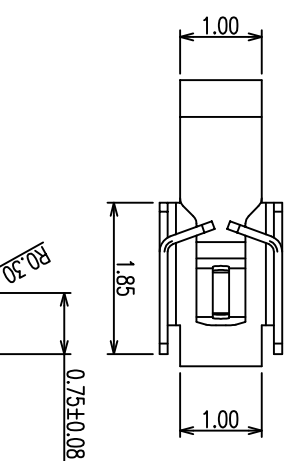

P.C.B LAYOUT
TOLERANCE: ±0.05

- PRODUCT NO.
1. SPECIFICATIONS:
- CONTACT RESISTANCE: 80M Ω , MAX
 - VOLTAGE RATING: 15V/AC/DC/MAX
 - CURRENT RATING: 1.0A/MAX
 - PRE-LOAD FORCE: 0.5±0.1N ON CONTACT POINT
 - MAX.BEAM DEFLECTION: 0.7±0.1N ON CONTACT POINT
 - DURABILITY: 200 CYCLES
 - OPERATING TEMPERATURE: -20°C-80°C
2. MATERIAL:
- STAINLESS STEEL T=0.10MM
3. FINISH:
- 1 μ ^2AU DN CONTACT AREA
 - GOLD FLASH PLATING DN SOLDER AREA
 - 80 μ ^2 MIN. NICKEL UNDERPLATING OVERALL

- PRODUCT NO.
- TP25-01 G2 07-03
- ① ② ③ ④ ⑤
- PRODUCT SERIES:
- TP25: 2.5H天线弹片
 - PIN NO.:
 - 01: 1PIN
 - MATERIAL:
 - G2: SUS304
 - 表面处理:
 - 07: 全金
 - SERIES NO.:
 - 03: 2.5H

PRAT DRAWING		YTCONN		Dongguan YTCONN Electronics Technology Co., Ltd.	
GENERAL TOLERANCE	X ±0.10 .XX ±0.05 .XXX ±0.02	DRAWING	DEVI	TITLE:	2.5H天线弹片
ANGLE TOLERANCE	X ±3° .XX ±2° .XXX ±1°	APPROVED		P/N:	TP25-01G207-03
		DATE	2013.05.04	DRAWING NO.	C-TP25-03
		UNIT	mm	SCALE	1:1
		SIZE	A4	SHEET	1 of 1
		REV	A		