



P8	DATA1
P7	DATA0
P6	VSS
P5	CLK
P4	VDD
P3	CMD
P2	CD/DAT3
P1	DAT2
PIN NUMBER	PIN NUMBER



REV	ECN #	DESCRIPTION	DRAWING	APPROVED	DATE
A		NEW RELEASE	DEY1		2012.04.26

NOTE:

- ELECTRICAL CHARACTERISTICS
1-1. CONTACT RESISTANCE: 80 milliohms MAX.
1-2. INSULATION RESISTANCE: 1,000 Megohms MIN.
1-3. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC MIN FOR 1 MINUTE.
- MECHANICAL CHARACTERISTICS
2-1. RETENTION FORCE: MIN100gf/PIN
2-2. DURABILITY: 5,000 CYCLES
2-3. PRODUCT COMPLIED WITH ROHS

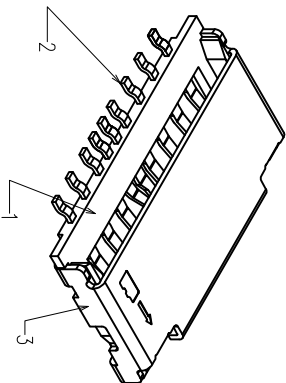

PRODUCT NO.

TF03 - 09 A B 05 - 06

① ② ③ ④

① 产品系列:

TF03-T-FLASH CARD 简易式

② 产品PIN数:

09: 9PIN

③ 塑胶材料:

A: LCP BLACK

④ 流水码:

06: H=1.5MM,W/SWITCH(type2)

3	SHELL	1	STAINLESS STEEL	
2	CONTACT	8	COPPER ALLOY MATING AREA Au PLATED	
1	HOUSING	1	THERMOPLASTIC UL94V-0-BLACK	
ITEM	MANE	Q/TY/EACH	MATERIAL/FINISHED	REMARK

CUSTOMER DRAWING

YTCONN

Dongguan YTCONN Electronics Technology Co., Ltd.

GENERAL TOLERANCE

X. ±0.20

.XX ±0.15

.XXX ±0.10

ANGEL TOLERANCE

X. ±.3°

.XX ±2°

.XXX ±1°

DRAWING

DEY1

APPROVED

DATE

2013.10.28

UNIT

mm

SCALE

1:1

SIZE

A4

SHEET

1 of 2

REV

A

DRAWING NO.

C-TF03-06