


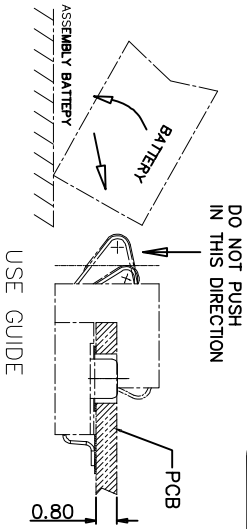
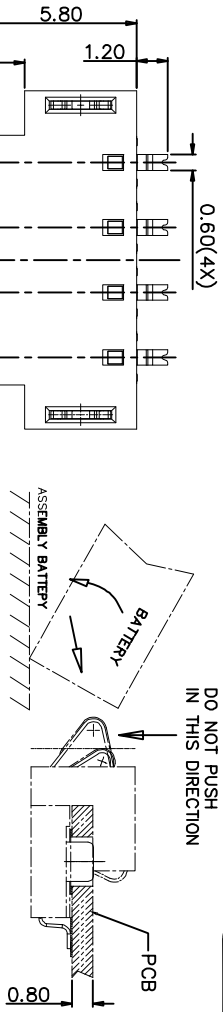
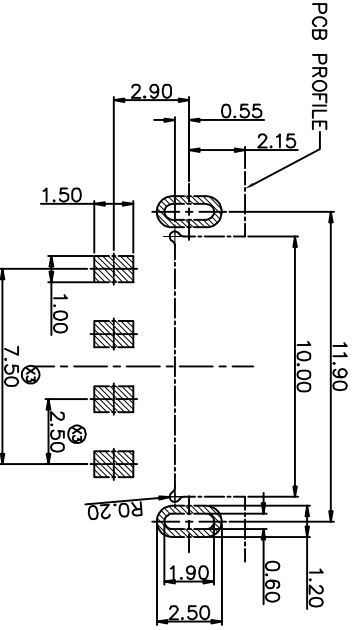


REV	EON #	DESCRIPTION	DRAWING	APPROVED	DATE
A		NEW RELEASE	DEYI		2012/11/24

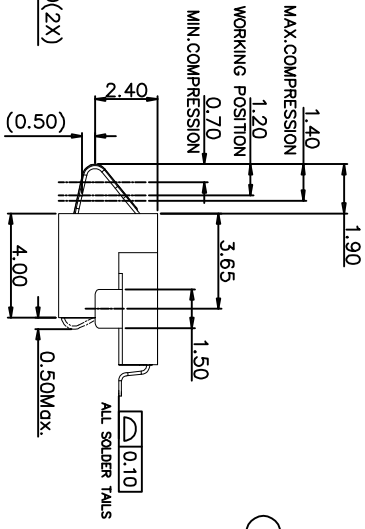

- NOTES:
- MATERIAL:
 - Housing: High Temperature Thermoplastic UL94V-0; Color Black.
 - Terminal: Copper Alloy.
 - Nail: Copper Alloy
 - SPECIALITY:
 - Rated current: 0.5A
 - Rated voltage: 30V
 - Contact Resistance: 50mΩ MAX
 - Insulation Resistance: 100MΩ MIN 100V DC
 - Dielectric withstanding voltage: 100V AC.
 - Solder ability: 245±5℃, 5±0.5s.
 - Durability: 5000 Cycles Min.
 - Operating condition: Temperature: -30℃ ~ +80℃; Humidity: 80% R.H MAX

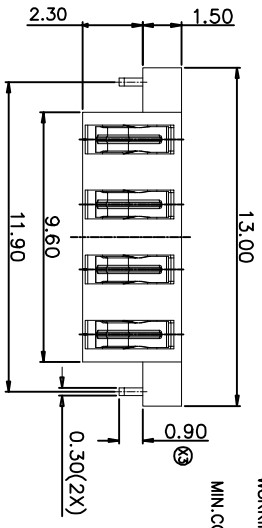

PRODUCT NO.

BT33-04 A B 05-01

① ② ③ ④

PRODUCT SERIES:

① BT33: 破板式4PIN电池座

② PIN NO.:

03: 3PIN

③ MATERIAL:

A: LCP

④ SERIES NO.:

01: 2.5PITCH 板上1.5

CUSTOMER DRAWING		YTCOON <small>http://www.hnytc.com</small>		Dongguan YTCOON Electronics Technology Co., Ltd.	
GENERAL TOLERANCE	DRAWING	DEYI	TITLE:	4PIN BATTERY 2.5PITCH板上1.5	
X ±0.20	APPROVED		P/N:	BT33-04AB05-01	
.XX ±0.15	DATE	2013.03.05	DRAWING NO.	C-BT33-01	
.XXX ±0.10	UNIT	mm	SCALE	1:1	SIZE A4
ANGEL TOLERANCE			SHEET	1of1	REV A
X ±3°					
.XX ±2°					
.XXX ±1°					