



- P1 : VCC
- P2 : RST
- P3 : CLK
- P4 : RESERVED
- P5 : GND
- P6 : VPP
- P7 : 1 / 0
- P8 : RESERVED

- 料号编码
- SM52-12 A B 05-00**
- ① 产品系列: SIM52: DOUBLE SIM CARD CONNECTOR
 - ② 产品PIN数: 12: 12PIN
 - ③ 塑胶材料: A: LCP
 - ④ 塑胶颜色: B: 黑色
 - ⑤ 产品流水号: 00:

- NOTES:
- ELECTRICAL SPECIFICATIONS:
CURRENT RATING: 0.5A.
VOLTAGE RATING: 5V.
CONTACT RESISTANCE: 50 MILL.OHM MAX.
INSULATION RESISTANCE: 1000 MEG.OHM MIN.
 - MECHANICAL SPECIFICATIONS:
DURABILITY: 5000 CYCLES MIN.

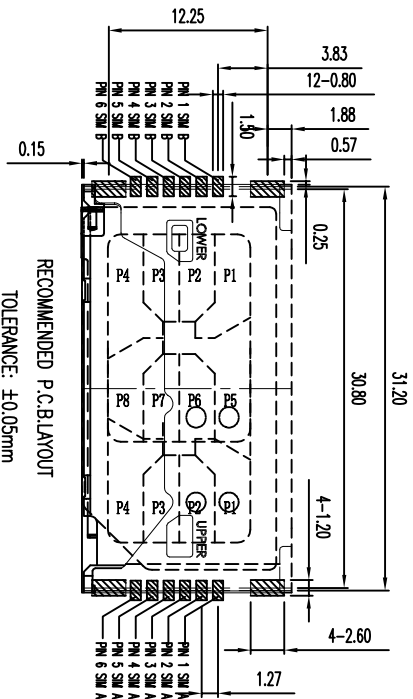

REV	ECN #	DESCRIPTION	DRAWING	APPROVED	DATE
A		NEW RELEASE	DEYI		05/11/14

PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
SIM CARD A PIN 1	GND	SIM CARD B PIN 1	GND
SIM CARD A PIN 2	VCC	SIM CARD B PIN 2	VCC
SIM CARD A PIN 3	VPP	SIM CARD B PIN 3	VPP
SIM CARD A PIN 4	RST	SIM CARD B PIN 4	RST
SIM CARD A PIN 5	I/O	SIM CARD B PIN 5	I/O
SIM CARD A PIN 6	CLK	SIM CARD B PIN 6	CLK



Dongguan YTCOON Electronics Technology Co., Ltd.

<http://www.ytconn.com>

CUSTOMER DRAWING

GENERAL TOLERANCE

X ±0.20

.XX ±0.15

.XXX ±0.10

ANGEL TOLERANCE

X ±3°

.XX ±2°

.XXX ±1°

DRAWING	DEYI	TITLE:	4.7H SIM CARD CONN.
APPROVED		P/N:	SM52-12AB05-00
DATE	2015.06.03	DRAWING NO.	C-SM52-00

UNIT	mm	SCALE	1:1	SIZE	A4	SHEET	1of1	REV	A
------	----	-------	-----	------	----	-------	------	-----	---