


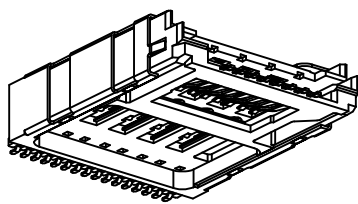
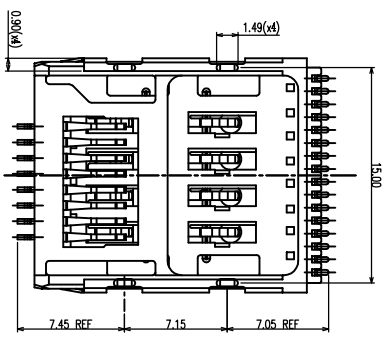

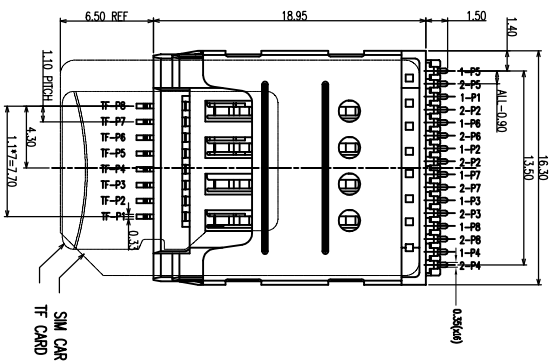


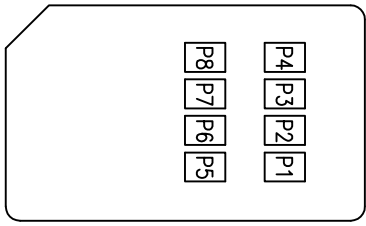

REV	ECN #	DESCRIPTION	DRAWING	APPROVED	DATE
A		NEW RELEASE	DEYI		10/14/14

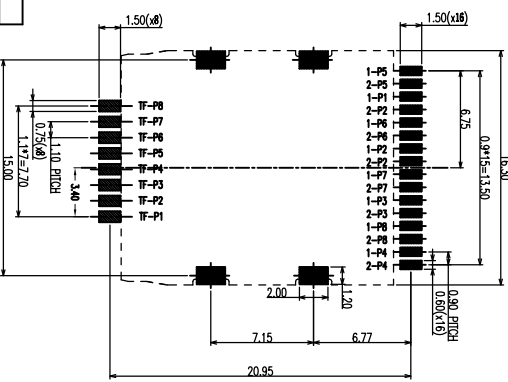

- NOTES:
- ELECTRICAL SPECIFICATIONS:
CURRENT RATING: 0.5A.
VOLTAGE RATING: 5V.
CONTACT RESISTANCE: 50 MILLI-OHM MAX.
INSULATION RESISTANCE: 1000 MEG-OHM MIN.
 - MECHANICAL SPECIFICATIONS:
DURABILITY: 5000 CYCLES MIN.

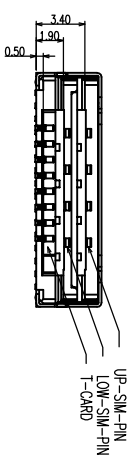

- 料号编码
SM59-24 C B 03-01
- ① 产品系列: SM59: DOUBLE SIMCARD CARD+TF CARD
 - ② 产品PIN数: 24: 24PIN
 - ③ 塑胶材料: C: LCP
 - ④ 塑胶颜色: B: 黑色
 - ⑤ 产品流水号: 01: 4, 6h

TF CARD PIN FUNCTION NO.	SIM CARD PIN FUNCTION NO.
P1 DAT:DATA LINE BI2	P1 VCC:PURE SIGNAL AND GND
P2 CD/DAT3:CARD DETECT/DATA LINE BI3	P2 RST:PSET SIGNAL
P3 CMD:COMMAND/RESPONSE	P3 CLK:CLOCKING SIGNAL
P4 VDD:SUPPLY VOLTAGE	P4 RESERVED
P5 CLK:CLOCK	P5 GND:PURE SIGNAL AND GND
P6 VSS:SUPPLY VOLTAGE GROUND	P6 VPP:PROGRAMMING VOLTAGE
P7 DAT:DATA LINE BI0	P7 I/O:SERIAL DATA INPUT/OUTPUT
P8 DAT:DATA LINE BI1	P8 RESERVED

CUSTOMER DRAWING		YTCONN http://www.tinyconn.com	
GENERAL TOLERANCE	DRAWING	TITLE:	4.6H SIM+TF 3IN 1 CARD
X ±0.20	DEYI	P/N:	SM59-24CB03-01
.XX ±0.15	APPROVED	DRAWING NO.	C-SM59-01
.XXX ±0.10	DATE	UNIT	mm
ANGEL TOLERANCE	2016.5.31	SCALE	1:1
X ±3°		SIZE	A4
.XX ±2°		SHEET	1 of 2
.XXX ±1°		REV	A

Dongguan YTCONN Electronics Technology Co., Ltd