




| REV | ECN # | DESCRIPTION | DRAWING | APPROVED | DATE |
|-----|-------|-------------|---------|----------|----------|
| A | | NEW RELEASE | DEV1 | | 09/03/16 |

Micro Sim卡/Sim卡 Pin脚定义 TF卡 Pin脚定义

| 8P | 描述 | No. | 描述 |
|----|----------|-----|---------|
| C1 | Vcc | T1 | DATE |
| C2 | RST | T2 | CD/DAT3 |
| C3 | CLK | T3 | CMD |
| -- | Reserved | T4 | VDD |
| C5 | GND | T5 | CLK |
| C6 | VPP | T6 | VSS |
| C7 | I/O | T7 | DAT0 |
| -- | Reserved | T8 | DAT1 |

TABLE A:

| ITEM | NAME | Q'Ty | MATERIAL / FINISH |
|------|---------|------|---|
| 3 | SHELL | 1 | STAINLESS STEEL/SOLDER TAIL GOLD PLATED |
| 2 | CONTACT | 14 | COPPER ALLOY/CONTACT AREA GOLD PLATED |
| 1 | HOUSING | 1 | HIGH TEMPERATURE UL 94-V0 BLACK |

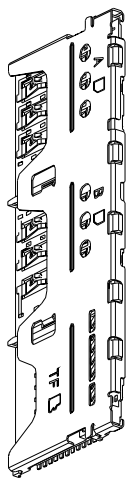

Autodesk 教育版产品制作

CUSTOMER DRAWING

YTCONN
 Dongguan YTCONN Electronics Technology Co., Ltd
<http://www.ytconn.com>

DRAWING DEV1

TITLE: DOUBLE MICRO SIM CARD+TF CARD
 31N1 1.35H卡座

P/N: SM64-20CB07-00

DATE: 2016.09.18

DRAWING NO.: C-SM64-00

GENERAL TOLERANCE: X ±0.20, XX ±0.15, XXX ±0.10

ANGEL TOLERANCE: X ±3°, XX ±2°, XXX ±1°

UNIT: mm **SCALE:** 1:1 **SIZE:** A4 **SHEET:** 1 of 1 **REV:** A

料号编码

SM64-20 C B 07-00
 ① ② ③ ④ ⑤

- ① 产品系列: SM64: (DOUBLE MICRO SIM CARD+TF CARD) 31N1 卡座
- ② 产品PIN数: 20: 20PIN
- ③ 塑胶材料: C: LCP
- ④ 塑胶颜色: B: 黑色
- ⑤ 产品流水号: 00-1.35H

NOTES:

- ELECTRICAL SPECIFICATIONS:
 CURRENT RATING: 0.5A,
 VOLTAGE RATING: 5V,
 CONTACT RESISTANCE: 50 MILL.OHM MAX,
 INSULATION RESISTANCE: 1000 MEG.OHM MIN.
- MECHANICAL SPECIFICATIONS:
 DURABILITY: 5000 CYCLES MIN.